


HC 313 PP Tape

PRODUCT DATA SHEET

CONSTRUCTION

Substrate: Polypropylene
Adhesive: Rubber
Liner: None

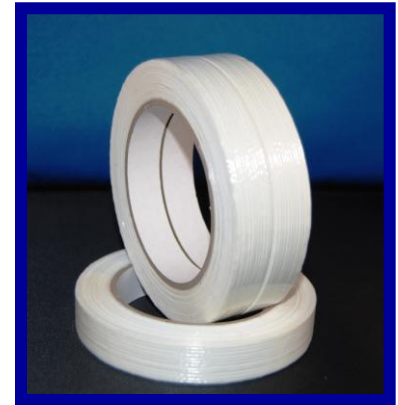

FEATURES

- A filament/strapping tape
- Rubber based adhesive system
- Bonds well over a wide range of environmental conditions

COMMON USES

- Supports pipe insulation during installation
- Bundling
- Strapping

TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness	0.004-in	0.102-mm	PSTC-133
Peel Adhesion to Stainless Steel	48-oz/in	5.3-N/cm	PSTC-101
Tensile Strength	100-lbs/in	175-N/cm	PSTC-131
Elongation	3.0%	3.0%	PSTC-131

APPLICATION

Application surface must be clean, dry and free of contaminants.

SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
0.5-in	180-ft	96	27
0.75-in	180-ft	64	27
1-in	180-ft	48	27
1.5-in	180-ft	32	27

Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 9.8.2009 11:01.