

# HC 710 Masking Tape

## PRODUCT DATA SHEET




### CONSTRUCTION

Substrate: Crepe Paper  
Adhesive: Acrylic

### FEATURES

- Painter's grade masking tape
- 14-day clean removal
- A specially formulated solvent based acrylic adhesive system
- Ultra high clean removal from a wide variety of surfaces
- Blue

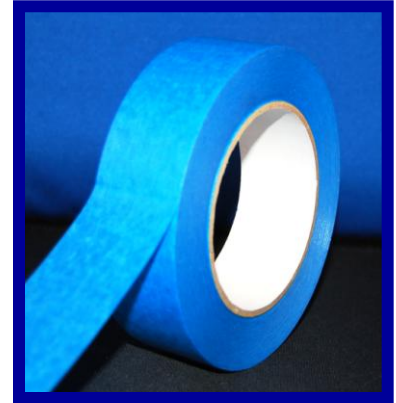

### TYPICAL USES

- Paint masking

### TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (Metric)	Test Method
Total Thickness without Liner	0.0055-in	0.1397-mm	PSTC-133
Peel Adhesion to Stainless Steel	18-oz/in	1.97-N/cm	PSTC-101
Tensile Strength	25-lbs/in	44-N/cm	PSTC-131
Elongation	12%	12%	PSTC-131

### APPLICATION

Application surface must be clean, dry and free of contaminants.

### SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

### STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
18-mm	55-m	64	27
24-mm	55-m	48	27
48-mm	55-m	24	27

*Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 9.22.2009 14:13.*