


HC 902 Double Coated Tape

PRODUCT DATA SHEET



CONSTRUCTION

Substrate: 0.5-mil Polyester Film
Adhesive: Solvent Acrylic
Liner: 60-lb Silicone Coated Kraft

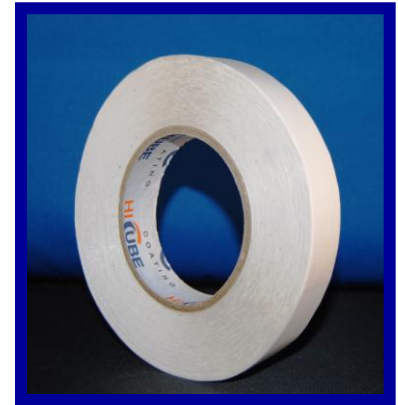

FEATURES

- SSL double coated tape
- Aggressive acrylic adhesive system
- Bonds well over a wide range of environmental conditions

COMMON USES

- Seal vapor retarder or facing overlap seams on mechanical and other types of insulation

TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness without Liner	0.0035-in	0.0889-mm	PSTC-133
Peel Adhesion to Stainless Steel	80-oz/in	8.8-N/cm	PSTC-101
Tensile Strength	8-lbs/in	14-N/cm	PSTC-131
Elongation	8%	8%	PSTC-131
Surface Burning Characteristics	5 Flame 5 Smoke	5 Flame 5 Smoke	UL 723* ASTM E 84

**Tested in accordance with UL 723*

APPLICATION

Application surface must be clean, dry and free of contaminants.

SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
1-in	180-ft	48	27
1.5-in	180-ft	32	27
2-in	180-ft	24	27

Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 9.8.2009 13:08.